

## Nuclear Emulsions for WIMP Search with a directional measurement

---

**Giovanni De Lellis**<sup>a,b,\*</sup>

<sup>a</sup>*Dipartimento di Fisica "E. Pancini", Università di Napoli "Federico II",  
via Cintia, Naples, Italy*

<sup>b</sup>*Istituto Nazionale di Fisica Nucleare,  
via Cintia, Naples, Italy*

*E-mail:* [giovanni.de.lellis@cern.ch](mailto:giovanni.de.lellis@cern.ch)

The nature of dark matter (DM) is one of the most relevant open problems both in cosmology and in particle physics. Many different experimental techniques have been developed to detect Weakly Interactive Massive Particles (WIMPs) as dark matter candidates via their scattering with detector atoms. The NEWSdm experiment, located in the Gran Sasso underground laboratory in Italy, is based on a novel nuclear emulsion technology with nanometric resolution and new emulsion scanning microscopy that can detect recoil track lengths shorter than one hundred nanometers. NEWSdm is able to reconstruct the direction of the nucleus recoiling, thus being capable of confirming the Galactic origin of the dark matter. We discuss the potentiality, both in terms of exclusion limits and discovery potential, of a directional experiment based on the use of a solid target made by newly developed nuclear emulsions and read-out systems reaching nanometric resolution. We also report the technological achievements and the measurement plan at Gran Sasso.

\*\*\* *The European Physical Society Conference on High Energy Physics (EPS-HEP2021), \*\*\**

\*\*\* *26-30 July 2021 \*\*\**

\*\*\* *Online conference, jointly organized by Universität Hamburg and the research center DESY \*\*\**

---

\*Speaker

Current experimental efforts for direct Dark Matter searches are devoted to the search in terrestrial underground detectors for rare interactions between galactic halo WIMPs and nuclei. Since dark matter detectors are rapidly improving their sensitivity, they will soon encounter the neutrino background where Solar, atmospheric, and diffuse supernova neutrinos mimic the dark matter signal. Neutrinos are therefore the ultimate background for WIMP direct searches as they cannot be shielded and produce recoils with similar rates and energy spectra. Moreover, the controversy in the low-mass (order of  $10 \text{ GeV}/c^2$ ) WIMP region where some dark matter hints were shown, highlights the need for additional discrimination power between WIMP events and backgrounds to unambiguously prove WIMP signals.

New generation detectors capable of measuring the direction of nuclear recoil tracks resulting from the WIMP elastic scattering off target nuclei would provide the discrimination of neutrino background and the unambiguous identification of galactic WIMPs as dark matter candidates.

Several approaches have been proposed [1]. The most popular one is based on the use of low pressure gaseous Time Projection Chambers that have put the first directional limits in the Spin-Dependent case. Nonetheless, this technology is hardly scalable to very large detector masses. The use of a solid target for directional searches would instead overcome this mass limitation, thus allowing to reach a high sensitivity in the low cross-section region. Nevertheless, in a solid medium, the track length of a nuclear recoil would be of the order of a few hundred nanometers, thus requiring a detector with ultra-high tracking resolution. This is the challenge addressed by the NEWSdm proposal.

## 1. The NEWSdm experiment

The approach proposed by the NEWSdm Collaboration [2, 3] consists of using a nuclear emulsion-based detector acting both as target and as nanometric tracking device. Nuclear emulsions are made of silver halide crystals embedded in a gelatine matrix. When ionizing particles pass through it, some of the halide crystals are modified in such a way that they are turned into grains of silver after the *developing* process. The three-dimensional trajectory of passing through particles can be reconstructed with an optical microscope by connecting all the silver grains. The NEWSdm project foresees the employment of a novel emulsion technology called Nano Imaging Trackers (NIT) [4, 5] with AgBr crystals of nanometric size, about one order of magnitude smaller than those used in the OPERA experiment [6]. The detector is conceived as a bulk of NIT surrounded by a shield to reduce the external background. The detector is then placed on an equatorial telescope in order to absorb the Earth rotation, thus keeping fixed the detector orientation with respect to the incoming apparent WIMP flux. The angular distribution of the WIMP-scattered nuclei is therefore expected to be strongly anisotropic with a peak centered in the forward direction.

This new generation of emulsion films show a very high linear density, ranging from 11 [4] to 29 [5] crystals/ $\mu\text{m}$ , thus making the reconstruction of trajectories with path lengths shorter than 100 nm possible, if analyzed by means of microscopes with enough resolution. The presence in the emulsion gel of lighter nuclei such as carbon, oxygen and nitrogen, in addition to the heavier nuclei of silver and bromine, results in a good sensitivity to WIMPs for masses above  $10 \text{ GeV}/c^2$ .

## 2. Optical microscope read-out system

In the NEWS experiment a WIMP signal consists of short-path, anisotropically distributed, nuclear recoils over an isotropically distributed background. The search for signal candidates requires the scanning of the whole emulsion volume. The read-out system has therefore to fulfill two main requirements: a fast, completely automated, scanning system is needed to analyse the target volume over a time scale comparable with the exposure; the spatial resolution has to reach the challenging value of a few tens of nanometers, well beyond the diffraction limit, in such a way to ensure high efficiency and purity in the selection of signal candidates.

The analysis of NIT emulsions is performed with a two-step approach: a fast scanning with a state-of-the-art resolution for the signal preselection followed by a pin-point check of preselected candidates with unprecedented nanometric resolution to further enhance the signal to noise ratio. An R&D program has improved by orders of magnitude the scanning speed [7–9] when compared to the OPERA systems [10]. The starting point of the emulsion scanning is the image analysis to collect clusters making up silver grains. Given the intrinsic resolution of the optical microscope ( $\sim 200$  nm), the sequence of several grains making a track of a few hundred nanometers may appear as a single cluster. Nevertheless, a cluster made of several grains tends to have an elliptical shape with the major axis along the direction of the trajectory, while a cluster produced by a single grain tends to have a spherical shape. The shape analysis with an elliptical fit is indeed the first approach to select signal.

In order to simulate the effect of a WIMP-induced nuclear recoil and to measure the efficiency and the resolution of the new optical prototype, a test beam with low velocity ions was performed. C ion beams with 100 keV were used. Silver grains belonging to the tracks appear as a single cluster. An elliptical fit of the cluster shape allows a clear identification of signal tracks with an angular resolution of about  $16^\circ$  [11].

The second step of the microscope analysis makes use of the plasmon resonance effect occurring when nanometric silver grains are dispersed in a dielectric medium. The polarization dependence of the resonance frequencies strongly reflects the shape anisotropy and can be used to infer the presence of non-spherical nanometric silver grains within a cluster made of several grains. NEWSdm is using this technology to retrieve track information beyond the diffraction limit. Images of the same cluster taken with different polarization angles show a displacement of the position of its barycenter. The analysis of this displacement allows to distinguish clusters made of a single grain from those made of two or more grains. An unprecedented resolution of about 80 nm has been achieved in both coordinates with this method [12]. The wavelength of the scattered light depends on the size of the grains where light is scattered off. Therefore, the latest version of the optical microscope makes use of a colour camera, thus providing sensitivity to the sense of the track, since at the end of the track range grains are expected to be larger and therefore the scattered light shifts to the red colour.

## 3. Experimental setup

The NEWSdm collaboration has setup at the Gran Sasso underground laboratory a facility for the emulsion handling and film production. Moreover, a dedicated structure was constructed to shield a detector of 10g mass against the environmental background sources over an exposure time of

about 1 month. The aim is to measure the detectable background from environmental and intrinsic sources and to validate estimates from simulations. The confirmation of a negligible background will pave the way for the construction of a pilot experiment with an exposure of about 10 kg year. The experimental setup is located in the Hall C of the underground Gran Sasso Laboratory and it consists of a shield from environmental backgrounds and a cooling system to ensure the required temperature level to the NIT emulsion detector. The optimization of the shield structure, along with the definition of the material thickness, was performed with a Geant4 simulation. Results from simulation show that the combination of polyethylene and lead as shielding materials ensures a good rejection power from environmental neutrons and gammas, respectively. In particular, a thickness of 40 cm for the polyethylene blocks and of 10 cm for the lead plates was chosen to get a negligible contribution from environmental background. An emulsion facility with the unique feature of producing emulsion films underground was recently installed in the Hall F underground and it is equipped with an emulsion production machine and all the tools for emulsion pouring and film development. The inner room of the facility hosting the emulsion production machine is shown in Fig. 1 while the shielded structure installed in Hall C is shown in Fig. 2.



**Figure 1:** Room of the Facility in the LNGS Hall F hosting the emulsion production machine.



**Figure 2:** Picture of the shielded structure installed in the underground LNGS Hall C.

#### 4. Background and sensitivity

Background sources for dark matter searches are  $\alpha$  and  $\beta$  particles,  $\gamma$ -rays and neutron induced recoils, while NIT are essentially not sensitive to minimum ionizing particles (MIP). The main sources of  $\alpha$ -particles are U and Th radioactive chains and Radon. The  $\alpha$ -particles produced in those processes have energies of the order of MeV and their range in emulsion is of the order of tens of microns, by far longer than WIMP-induced nuclear recoils.  $\alpha$ -particles can therefore be identified and discarded in the emulsions by an upper cut on the track length.

The  $\beta$ -rays produced in  $^{14}\text{C}$  decay constitute a non-negligible contribution to the total background budget. This kind of background is anyway less critical for NIT emulsion with respect to other sources: electrons can be rejected by properly regulating the emulsion response, in terms of number of sensitized crystals per unit path length, through a chemical treatment of the emulsion itself. Moreover possible improvements in the rejection power can be achieved exploiting the response of  $\beta$ -rays to the polarized light scattering or performing a cryogenic exposure and by exploiting the phonon effect.


Neutron induced recoils are not distinguishable from the expected WIMP signal, except for the isotropic angular distribution and for the typical track length, largely exceeding the range expected for WIMP-induced recoils. Three types of neutron sources affect underground experiments: radiogenic neutrons in the MeV range produced in  $(\alpha, n)$  and spontaneous fission reactions in the detector due to its intrinsic radioactive contaminants, cosmogenic neutrons with energy spectrum extending to GeV energies induced by muons penetrating underground through the rock, neutrons induced by environmental radioactivity.

While the external neutron flux can be reduced to a reasonable level with an appropriate shielding, the intrinsic emulsion radioactivity would be responsible of an irreducible neutron yield through  $(\alpha, n)$  and  $^{238}\text{U}$  spontaneous fission reaction. In order to estimate this contribution, the activities of U and Th in the emulsion components has been measured with the Inductively Coupled Plasma Mass Spectrometry (ICP-MS) and with the  $\gamma$ -spectrometry. The detectable neutron-induced background was estimated to be about 0.06 per year per kilogram [13], thus allowing to design a detector for an exposure of 10 kg year without any further purification.


#### 4.1 Sensitivity

Figure 3 shows a typical nanometric track reconstructed by the optical microscope and compared with the reconstruction performed at a SEM microscope [12]. The track is produced by a 100 keV Carbon ion implanted in the emulsion film. The comparison with the SEM shows a comparable resolution, currently limited at 80 nm by the pixel size [12] of the optical system. Moreover, unlike the SEM microscope, the imaging grabbing of the developed optical microscope is a few orders of magnitude faster than a SEM while granting the integrity of the sample, important for possible re-analyses at a later stage.

Fig. 4 shows the discovery potential of an emulsion based detector. Different track length thresholds and detector exposures are assumed: the dotted red line represents a 50 nm threshold with 100 ton year exposure while the solid blue line assumes a 30 nm threshold with an exposure of 10 ton year. Both curves assume a negligible background. Given the achieved accuracy of 80 nm reported in Ref. [12] with the current implementation, it is realistic to assume a position resolution of several tens of nanometers provided that the grain density is sufficiently high [5]. In Fig. 4 we have also compared the exclusion limits with the thick orange curve representing the so-called neutrino floor for a Xe/Ge detector [14]. A mass of about 10 ton would provide sensitivity to explore the region beyond the neutrino floor.

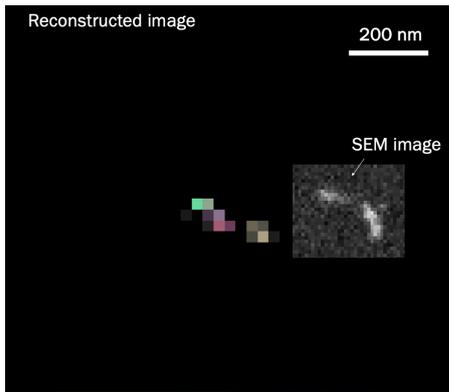

**Figure 3:** Reconstructed image showing the track produced by a 100 keV Carbon [12].

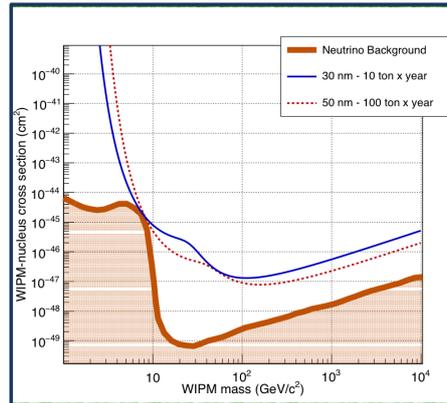

**Figure 4:** Discovery potential of an emulsion detector with different track length thresholds and exposures. The neutrino floor [14] is also drawn for comparison.

## 5. Summary and outlook

The NEWSdm experiment is meant to be the first detector with a solid target for directional dark matter searches: the use of a nuclear emulsion based detector, acting both as target and tracking device, would allow to extend dark matter searches beyond the neutrino floor and provide an unambiguous signature of the detection of Galactic dark matter. The novel emulsion technology, based on the use of nuclear emulsion films with nanometric AgBr crystals and of newly developed optical microscopes has achieved already an unprecedented spatial accuracy achieving the observation of track lengths shorter than 100 nm.

The current intrinsic radioactive level allows to design an experiment with a 10 kg year exposure. A careful selection of the emulsion components and a better control of their production could further increase the radiopurity, thus allowing larger exposures.

We plan to perform a pilot experiment with  $\sim 10$  kg year exposure to explore the region indicated by the DAMA experiment with a powerful and complementary approach and to act as a demonstrator of this new directional technique. The subsequent step would be to further extend the detector mass and sensitivity to explore the region of the so-called neutrino floor.

## References

- [1] J. B. R. Battat et al, *Physics Reports* **662** (2016) 1
- [2] A. Alexandrov et al, *Preprint astro-ph/1604.04199*, LNGS-LOI 48/15
- [3] N. Agafonova et al., *Eur. Phys. J.* **C78** (2018) 578.
- [4] N. Natsume et al, *Nucl. Instr. Meth. A* **575** (2007) 439
- [5] T. Naka et al, *Nucl. Instrum. Meth. A* **718** (2013) 519
- [6] N. Agafonova et al, OPERA Collaboration, *JINST* **4** (2009) P04018.

- [7] A. Alexandrov et al, *JINST* **11** (2016) P06002
- [8] A. Alexandrov et al, *Scientific Reports* **7** (2017) 7310
- [9] A. Alexandrov, G. De Lellis and V. Tioukov, *Scientific Reports* **9** (2019) 2870.
- [10] Alexandrov A et al, *JINST* **10** (2015) P11006
- [11] A. Umemoto et al, *PTEP* (2019) 063H02.
- [12] A. Alexandrov et al, *Scientific Reports* **10** (2020) 18773.
- [13] A. Alexandrov et al, *Astropart. Phys.* **80** (2016) 16
- [14] Billard J, Strigari L and Figueroa-Feliciano E, *Phys. Rev. D* **89** (2014) 2