

Simulations Of Beam Losses For The Prototype Electric Dipole Moment Storage Ring

S.Siddique,^{a,b,*} **J. Pretz**^{b,c} and **A. Lehrach**^{b,c}

on behalf of JEDI[†] and CPEDM[‡] Collaborations

^a*GSI Helmholtzzentrum für Schwerionenforschung GmbH, Darmstadt, Germany*

^b*III Physikalisches Institut B, RWTH Aachen University, Aachen, Germany*

^c*Forschungszentrum Jülich GmbH, Jülich, Germany*

E-mail: saad.siddique@rwth-aachen.de

One possible explanation for the difference between matter and antimatter asymmetry may lie in CP-violation, which can be detected through the presence of a permanent electric dipole moment (EDM) in subatomic particles. To measure the EDM of charged particles with high accuracy, a state-of-the-art technique called "frozen spin" can be employed in an accelerator. The EDM experiment consists of three stages: initially using the magnetic ring COSY (Cooler Synchrotron Storage Ring at Forschungszentrum Juelich), followed by a prototype EDM ring, and ultimately the all-electric EDM ring. The intermediate ring serves as a replica of the final ring, enabling the investigation of different systematic effects while incorporating the fundamental principles of the final design. For the prototype EDM ring, simulations of beam dynamics are conducted using various lattices to optimize beam lifetime and minimize systematic effects. The initial design of the prototype EDM ring facilitated the estimation of beam losses using analytical formulas. Ongoing research endeavors strive to enhance the precision of EDM measurements and reduce systematic effects.

This proceeding is an extended version of the IPAC23 proceeding [1]. Emittance growth rate was also discussed which supports our previous results.

19th Workshop on Polarized Sources, Targets and Polarimetry (PSTP2022),

26-30 September 2022

Mainz, Germany

*Speaker

† Jülich Electric Dipole moment Investigation

‡ Charged Particle Electric Dipole Moment

1. Introduction

The matter-antimatter asymmetry riddle can be solved by observing the existence of permanent Electric Dipole Moments (EDM) of subatomic particles. However, the Standard Model of particle physics predicts non-vanishing EDMs, but their magnitude is too small to be detected with current techniques. The existence of permanent EDMs is only possible through charge and parity (*CP*) symmetry violation [2]. The JEDI Collaboration is working on the investigation of EDMs of protons and neutrons. The proposed storage ring is to measure the EDM of the proton with all-electric elements for ultimate precision. However, this ring follows two stages (Precursor experiment at COSY and Prototype proton storage ring) to reduce systematic effects and increase the EDM measurement precision [3].

2. Principle to Measure EDM in a Storage Ring

The experimental method to measure an electric dipole moment of a fundamental particle or subatomic system relies on the spin precession rate in an external field. The spin motion can be understood by studying the Thomas-BMT equation:

$$\frac{d\vec{S}}{dt} = \left(\vec{\Omega}_{\text{MDM}} + \vec{\Omega}_{\text{EDM}} \right) \times \vec{S}, \quad (1)$$

where

$$\vec{\Omega}_{\text{MDM}} = -\frac{q}{m} \left[G\vec{B} - \frac{\gamma G}{\gamma+1} \vec{\beta}(\vec{\beta} \cdot \vec{B}) - \left(G - \frac{1}{\gamma^2-1} \right) \frac{\vec{\beta} \times \vec{E}}{c} \right]$$

$$\vec{\Omega}_{\text{EDM}} = -\frac{\eta q}{2mc} \left[\vec{E} - \frac{\gamma}{\gamma+1} \vec{\beta}(\vec{\beta} \cdot \vec{E}) + c\vec{\beta} \times \vec{B} \right].$$

Here, \vec{S} denotes the spin vector in the lab frame, t is the time in the laboratory system, $\vec{\beta} = \vec{v}/c$ and γ are the relativistic Lorentz factors, and \vec{B} and \vec{E} are the magnetic and electric fields respectively. G (magnetic anomaly) is a dimensionless quantity and η describes the strength of the EDM. The angular frequencies, $\vec{\Omega}_{\text{MDM}}$ and $\vec{\Omega}_{\text{EDM}}$, act through the magnetic dipole moment (MDM) and electric dipole moment (EDM) respectively. For a particle ensemble with a spin polarisation initially aligned along the momentum vector, if the "Frozen-spin" condition applies then the vertical polarisation build-up with time in response to the external radial electric field is due to the particle's EDM [3]. The change in polarisation direction can be determined by scattering the beam through a carbon target and analyzing the azimuthal distribution of the scattered particles. A vertical polarisation results in a left-right asymmetry in the detector. Fig. 1 illustrates the method to measure the EDM in the storage ring.

The project to measure EDM of charged particles is divided into three stages. The precursor experiment at COSY Forschungszentrum Jülich is the starting point of this project. The effort to measure the EDM of neutrons in a magnetic storage ring is ongoing. The second stage is to build a small prototype storage ring of around 120 m in circumference. The third and last stage will be a fully electrostatic ring with a circumference of about 500 m. The concept of these stages is to reduce systematic effects and increase the EDM measurement sensitivity. This paper focuses on 2nd stage of the project.

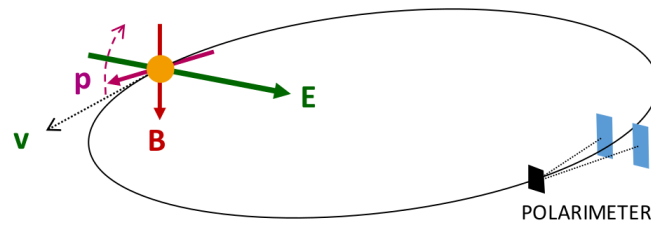


Figure 1: The diagram shows a particle motion around the storage ring under the influence of electromagnetic fields. The polarization, initially along the particle’s momentum, precesses towards the vertical direction in response to the radial electric field acting on the EDM. The vertical component of the polarization is observed by scattering in the polarimeter [3].

3. The Prototype Storage Ring (PTR)

The PTR layout is shown in Fig. 2. It will be operated in two different modes. The first mode will be an all-electric ring with $T = 30$ MeV protons, with the aim to store the beam for a longer time (*i.e.* 1000 sec), to inject multiple polarization states and to develop and benchmark simulation tools. Whereas the second mode will be an electromagnetic ring with $T = 45$ MeV protons which will be used to measure EDM with the Frozen-spin method by counter-rotating beams simultaneously. In

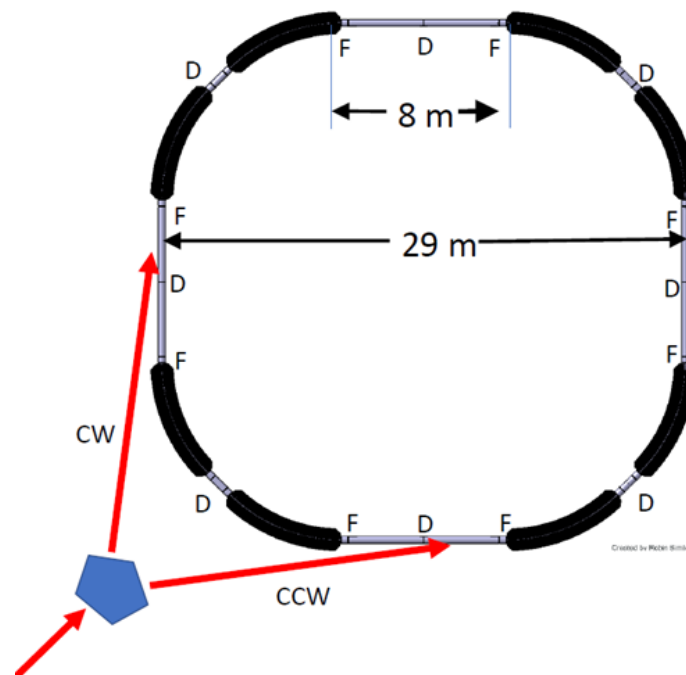


Figure 2: The basic layout of the PTR, consisting of eight electrostatic deflectors, three families of quadrupoles (horizontally focusing: QF, horizontally defocusing: QD and straight section: QSS), and two families of sextupoles with a total circumference of around 120 m [4].

this paper, the first mode of PTR was considered to store a high beam intensity for a longer time,

which requires a suitable lattice structure of the ring. Therefore, four different lattices with different vertical focusing strengths were studied in the context of beam losses.

4. Beam Simulations

For the PTR, lattice optics is studied through the usage of *Methodical Accelerator Design* MAD-X [5] (the electro-static bendings were defined by entering the transfer matrices). After generating the lattice optics for the PTR (electric mode), the beam losses are calculated using analytical formulas. Four lattices were studied in the following section with different optical functions.

4.1 Optical Functions

In the PTR design, the spin dynamics strongly depend on the vertical focusing structure of a strong ring. Therefore, different lattice types have been investigated for different vertical focusing strengths, resulting in four different maximum vertical beta functions β_{y-max} (see Fig. 3):

- Strong focusing lattice with $\beta_{y-max} = 33$ m
- Medium focusing lattice with $\beta_{y-max} = 100$ m
- Weak focusing lattice with $\beta_{y-max} = 200$ m
- Weaker focusing lattice with $\beta_{y-max} = 300$ m

After generating these lattices, beam loss estimations were performed for all major effects and in two different scenarios, with residual gas only and with a carbon target.

4.2 Beam Losses Estimation

Four major effects were considered for the immediate beam losses. These effects are Hadronic Interactions, Single Coulomb Scattering, Energy Loss Straggling, and Touschek Effect (*i.e.* IntraBeam Scatterings). The basic beam loss rate formula for hadronic and single coulomb scatterings is [6]:

$$1/\tau = n\sigma_{tot}f_{rev}, \quad (2)$$

where n is the residual gas or target density, σ_{tot} is the total cross-section and revolution frequency f_{rev} of the proton beam is 0.726 MHz for this ring. Nitrogen equivalent pressure $P_{N_2,eq} = 2.8 \times 10^{-11}$ Torr and 30 μm thick target was considered for these calculations. In the presence of the internal target, the effects of the residual gas on the beam are negligible, since the thickness of the target is much greater than the integral density of the residual gas over the circumference of the ring. A beam of 10^9 particles and a transverse emittance of $\epsilon_{x,y} = 10$ mm mrad is taken into account for these processes.

The hadronic interaction effect is independent of the lattice structure, so it produces the same result for all lattices. The beam loss rate due to energy loss straggling is close to zero because of low beam energy and high longitudinal acceptance. After a small energy loss, the particles remain in the stable part of the longitudinal bucket and are not lost. Therefore, only three processes are

PTR Lattices

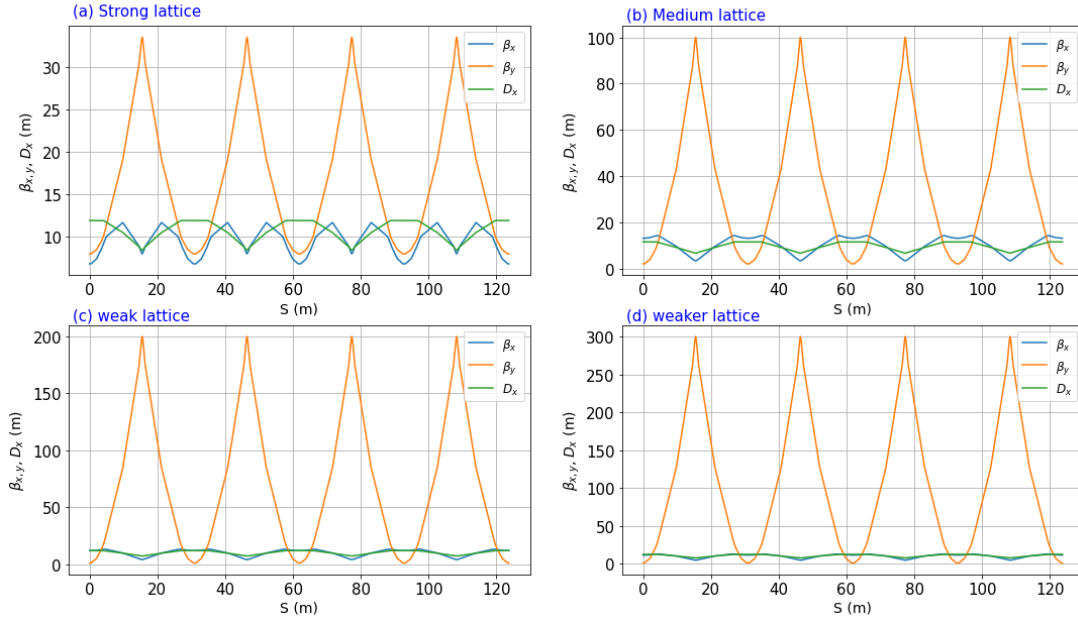


Figure 3: (a) is a strong focusing lattice with $\beta_{y-max} = 33$ m, (b) is a medium focusing lattice with $\beta_{y-max} = 100$ m, (c) is weak focusing lattice with $\beta_{y-max} = 200$ m, (d) is weaker focusing lattice with $\beta_{y-max} = 300$ m, β_x is a horizontal beta function and D_x is horizontal dispersion.

Lattice β_{y-max}	H.I $10^{-6} s^{-1}$	SCS $10^{-4} s^{-1}$	IBS $10^{-4} s^{-1}$	τ^{-1} $10^{-4} s^{-1}$
33 m	2.7	7.6	2.34	9.47
100 m		27.3	2.10	27.5
200 m		94.6	1.99	90.0
300 m		208	1.90	195

Table 1: Estimations of all major processes H.I (Hadronic Interactions), SCS (Single Coulomb Scatterings), and IBS (IntarBeam Scatterings) for all four lattices leading to the total beam loss rate τ^{-1} .

crucial for the total beam loss rate which can be seen in table 1. These calculations show that as β_{y-max} is getting higher, the beam loss rate is also increasing which causes a shorter beam lifetime. Hence, to store the beam for 1000 sec in the PTR, a lattice with β_{y-max} below 100 m would be preferable.

After getting results from rough analytical formulas, another software BetaCool [7] was used to perform beam loss calculations. BetaCool is used because it enables a more realistic description of the storage ring. A very good agreement between analytical calculations and Betacool results was observed, which can be seen in figure 4.

The emittance growth rates were also calculated by using BetaCool. These rates were calculated for residual gas only. It can be seen in the figure 5 for a strong lattice with $\beta_{y-max} = 33$. The beam emittance growth up to 2500 sec without any fast blow-up strengthens our argument that a lattice

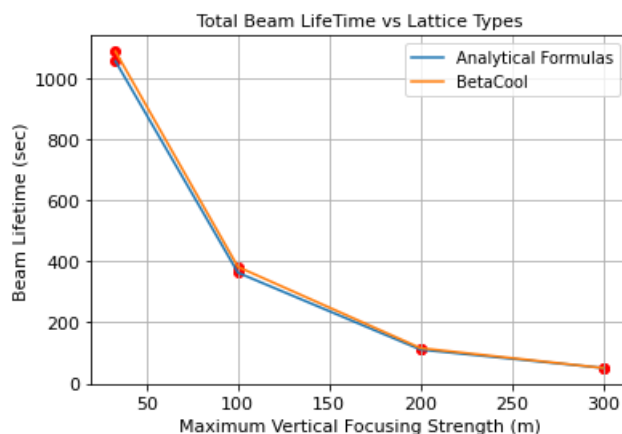


Figure 4: This plot shows a comparison of analytical formulas and BetaCool results in the form of beam lifetime vs lattice types (in terms of their maximum vertical betatron function β_{y-max}).

with β_{y-max} between 33 m to 100 m is a reasonable choice for longer beam lifetime.

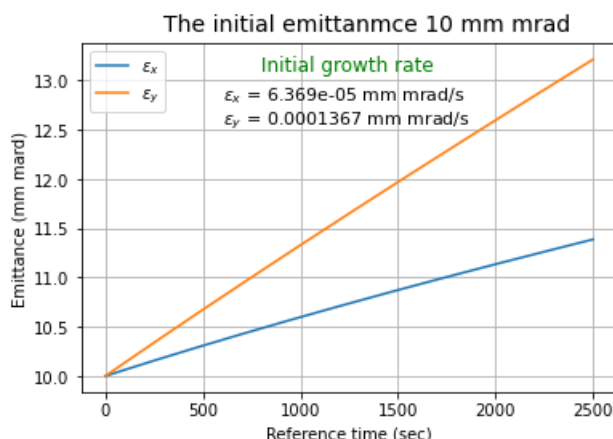


Figure 5: Emittance growth for a lattice with $\beta_{y-max} = 33$ m vs time. The beam interacts with residual gas only. The initial Horizontal and Vertical emittance growth rates (ϵ_x, ϵ_y) are also shown within the plot.

5. Summary and Conclusion

To summarize, selecting a lattice with a vertical focusing strength below a certain threshold (*e.g.*, $\beta_{y-max} \leq 100$ m) appears to be a viable option for achieving a longer beam lifetime, and BetaCool also confirmed these findings. However, conducting a more comprehensive examination of the interaction between the beam and the target could potentially lead to even greater improvements in beam lifetime, as the target is a significant factor contributing to beam losses. As a result, ongoing efforts are being made to track the beam and its interaction with the target.

References

- [1] S. Siddique, *Simulations of beam dynamics and beam lifetime for the prototype edm ring*, in *Proc. IPAC'23*, no. 14 in IPAC'23 - 14th International Particle Accelerator Conference, pp. 2354–2357, To be Published in JACoW Publishing, Geneva, Switzerland, 05, 2023, DOI.
- [2] A. Sakharov, *Violation of CP Invariance, C Asymmetry, and Baryon Asymmetry of the Universe*, *Soviet Physics Uspekhi* **34** (1991) 392.
- [3] CPEDM collaboration, F. Abusaif et al., *Storage ring to search for electric dipole moments of charged particles: Feasibility study. Storage Ring to Search for Electric Dipole Moments of Charged Particles - Feasibility Study*, CERN Yellow Reports: Monographs, CERN, Geneva. Geneva (Jan, 2019), [10.23731/CYRM-2021-003](https://doi.org/10.23731/CYRM-2021-003).
- [4] A. Lehrach et al., *Design of a Prototype EDM Storage Ring*, in *Proceedings, 23rd International Spin Physics Symposium: Ferrara, Italy*, pp. 10–14, 2018.
- [5] H. Grote and F. Schmidt, “CERN MADX introduction..” <http://mad.web.cern.ch/mad/madx.old/Introduction/doc.html>, 2002.
- [6] F. Hinterberger, *Beam-Target Interaction and Intrabeam Scattering in the HESR Ring. Emittance, Momentum Resolution and Luminosity*, Tech. Rep. JUEL-4206, Forschungszentrum Jülich GmbH (Germany) (Feb, 2006).
- [7] A.O. Sidorin, I.N. Meshkov, I.A. Seleznev, A.V. Smirnov, E.M. Syresin And G.V. Trubnikov, *BETACOOOL program for simulation of beam dynamics in storage rings*, .